


- NOTES:
- THIS DRAWING IS MEANT TO PROVIDE CUSTOMER MOUNTING DATA ONLY. ALL DIMENSIONS ARE REFERENCE UNLESS OTHERWISE NOTED.
 - THE TORQUE INFORMATION CONTAINED IN THIS DOCUMENT IS FOR REFERENCE ONLY. IT IS RECOMMENDED THAT THIS BRAKE BE TESTED IN THE SPECIFIC APPLICATION TO VERIFY PERFORMANCE.
 - MAXIMUM OPERATING PRESSURE IS 1500 PSI [103 BAR]. PRESSURE SPIKES AND SURGES NOT TO EXCEED 2000 PSI [138 BAR].
 - BRAKE IS PREFILLED WITH 240 mL OF AW68 OIL.
 - 0.126 CU. IN. [2.06 mL] MIN ACTUATION VOLUME (NEW).
0.362 CU. IN. [5.93 mL] MIN ACTUATION VOLUME (WORN).
 - CUSTOMER TO APPLY LUBRICANT TO PILOT. (DOW CORNING 200 OR EQUIVALENT)
 - ACTUATION FLUID: PETROLEUM BASED HYDRAULIC FLUID ONLY.

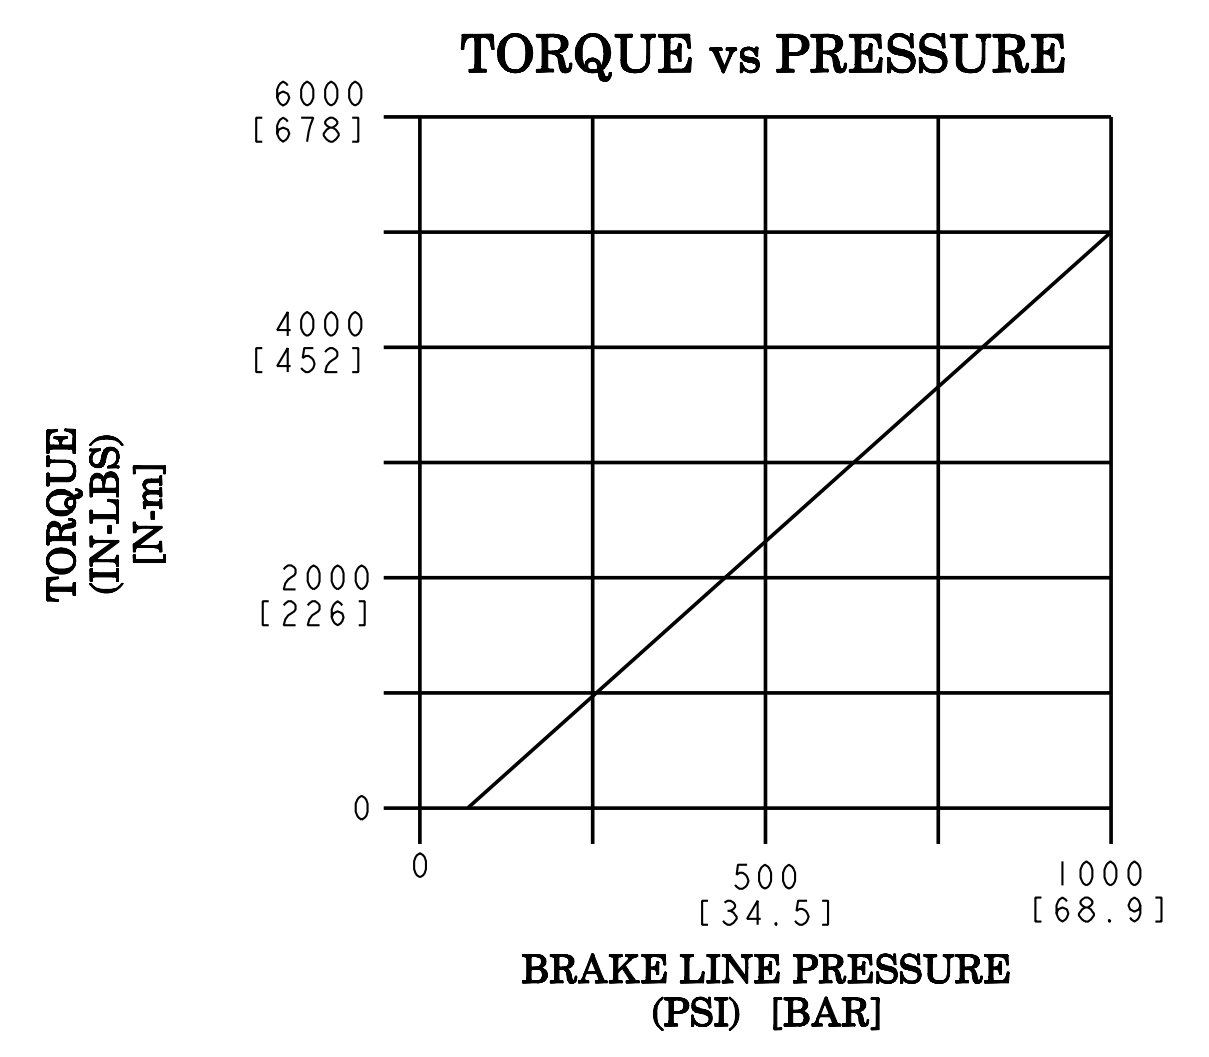

NLL	H	28956	UPDATED PICTORIALY	02-10-16	KMc
KMc	G5	28454	UPDATED PICTORIALY	12-19-14	NLL
KMc	G4	28454	WAS DIM 4.010	12-19-14	NLL
KMc	G3	28454	WAS DIM 0.094	12-19-14	NLL
KMc	G2	28454	WAS DIM 2.296	12-19-14	NLL
KMc	G1	28454	WAS DIM 3.452	12-19-14	NLL
KAD	F1	27568	ADD 1.500 2 PLCS	08-28-13	KMc
KAD	E	27194	UPDATED PICTORIALY	11-20-12	SSS
KAD	D	26723	WAS DIM 1.245	08-24-11	KMc
KAD	C5	26682	WAS DIM 3.441	08-16-11	KMc
KAD	C4	26682	WAS DIM 2.285	08-16-11	KMc
KAD	C3	26682	WAS DIM 0.083	08-16-11	KMc
KAD	C2	26682	WAS DIM 0.974	08-16-11	KMc
KAD	C1	26682	WAS DIM 3.999	08-16-11	KMc
NDC	B	26391	UPDATED PICTORIALY	01-11-11	JAH
JAH	A	26362	RELEASE FOR PRODUCTION	12-10-10	LTC
CHRR SYM	ECO		DESCRIPTION	DATE	BY
DO NOT SCALE THIS DRAWING. PROPRIETARY DATA: NOT TO BE DISCLOSED, USED, OR DUPLICATED FOR PROCUREMENT OR MANUFACTURING PURPOSES, EXCEPT AS AUTHORIZED IN WRITING BY AUSCO, INC.					
PROJECT 4703			DATE 07-16-10	PART NAME M/D WET SERVICE BRAKE	
DESIGNER K. McALLISTER			SCALE 1.000	PART NUMBER CC-93040	

RATED TORQUE (LB IN) [Nm]	INPUT PRESSURE (PSI) [BAR]	INPUT	OUTPUT
5,000 [565]	1,000 [69]	27T 24/48	4 ON Ø 4.000 IN Ø 101.6 MM
SERVICE BRAKE DATA		SPLINE DATA	MOUNTING